



CONNECTION DETAILS

TOP SIDE

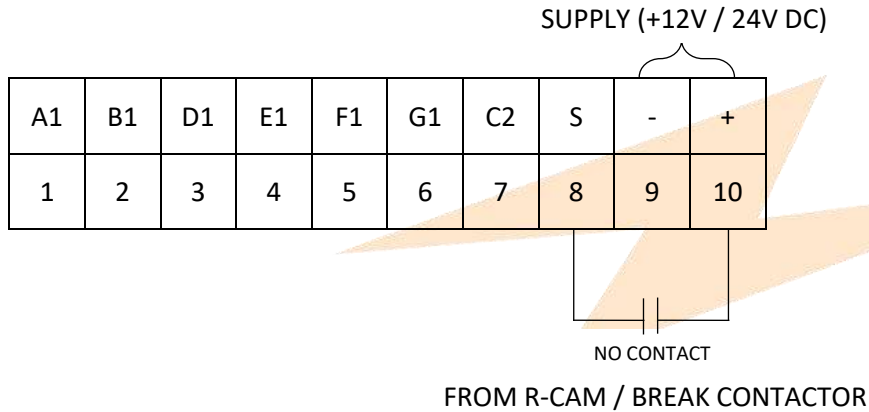

BOTTOM SIDE

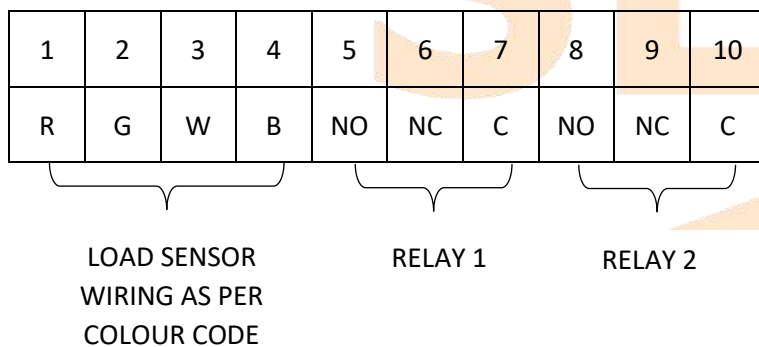

INSTRUCTIONS

1. First give supply to the TOP SIDE CONNECTOR 12V DC or 24V DC on PIN number 10 (+) & 9 (-)
2. Bottom side connector loadcell connection, 1 = Red, 2 = Green, 3 = White, 4 = Black (Rope Sensor)
3. To cut safety use RELAY 1 for manual door cut CG or for auto door cut DO & DO's COMMON
4. Online running overload bypass circuit – take 2 wires from NO contacts of RCAM or BREAK contactors, connect 1st wire in PIN 10 (+) and 2nd wire in PIN 8 (S)
5. For buzzer use RELAY 2